

timer lock safes - Compact series



EK 1557 OB Compact



B 402, M1



B 301, M2



ZK 5S, DK 5



ZK 5U, DK 5



Typical inner outfit.

Timer lock safes of the series EK 1500 COMPACT are derivative from basic series EK 1500 constructively and functionally. They protect the cash and documents during operation and prevent direct opening of the safe. The safe can be opened only after a preset time interval. This minimizes the risk of losses in case of a possible raid. The safe is protected by two cases of high rigidity. Modular construction makes it possible to meet the need of each customer. The electronic control with a microprocessor is an up-to-date facility which meets all safety standards for cash handling.

The drawers of safe can be equipped with a different plastic and metal accessories.
Banknote holders: B 010, B 201, B 301, B 310, B 401, B 402, Z 001, Z 101.
Caskets: DK 1, DK 2, ZK 1S(U), ZK 2S(U).



DALLAS
Contact memories



NC
Contactless systems



CARD
Chip card

Series	EK 1500 Compact
Outer dimensions / (HxWxD)	680 x 480 x 590 mm
Weight (according type)	85 - 120 kg
Power supply	ZN 12/1600
Standard colour	RAL 7035


The multiple safety is guaranteed by:

- a) a key switch to switch the safe on
- b) access after entering the PIN code (LOG-IN, LOG-OUT system) or other identification systems: DALLAS, CHIP CARD . . .
- c) protection against unauthorized manipulation
- d) time lock and two-stage locking of the drawers
- e) access to cash and securities after a preset time when the drawer opens automatically
- f) 30 levels delayed opening of drawers from 0 to 90 (optional for client models) minutes independently for each drawer
- g) the parameters of timer lock and access programming are setting directly from keyboard of timer lock safe
- h) access for eight users with acoustic and optical signalization of the time lock activation
- i) the safe can be controlled by a computer through RS 323C interface in case of customer's wish
- j) electromechanic control of slot opening
- k) automatic two stage blocking after repeated closing of the drawers or slots
- l) the safe is connected to the mains through the power adaptor ZN 12/1600 and to an built-in accumulator
- m) the safe can be connected to a central electronic safety system
- n) possibility of upgrade the connecting software for banknote recycling automats
- o) lockable and portable internal caskets of various types
- p) plastic accessories of drawers for cash handling
- r) possibility of anchoring the safe to the floor
- s) explicit marking of the workplace using the safes




EK 1559 ZB Compact


timer lock safes

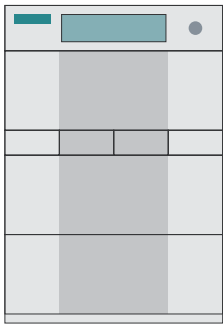


EK 1551 S Compact

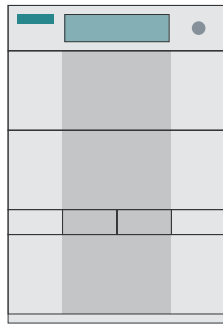


EK 1552 S Compact

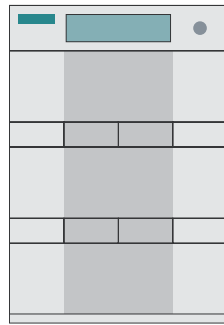


EK 1553 S Compact

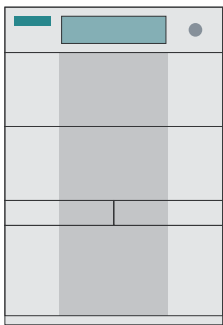


EK 1554 Compact

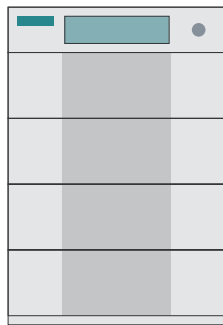


EK 1555 Compact

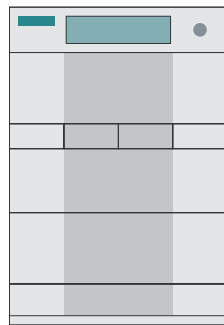


EK 1557 S Compact

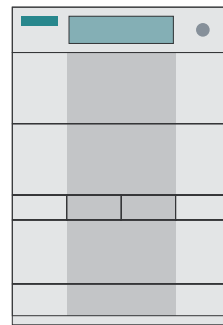


EK 1557 ZB Compact

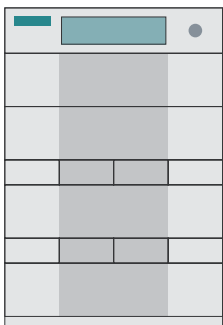


EK 1557 OB Compact

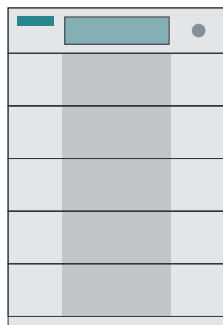


EK 1558 Compact

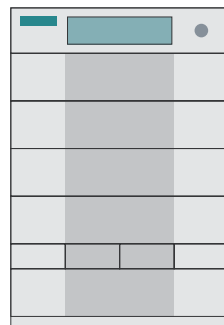

EK 1558 OB Compact

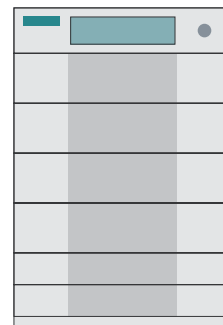

EK 1559 (A,VB,D) Compact

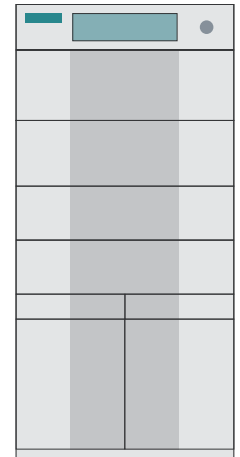

EK 1559 ZB Compact

Coming soon

Under-counter safe EK 4800 PT3 (PT1, PT2)

Under-counter safe can be assembled as a part of counters of desks at cash counters. Basic design of safety class 3 according to EK 1143 É 1(80/120 RU), alternatively in safety class 1 (EK 4800PT1) and 2 (EK 4800 PT2). The safe design is based on standard series EK 4700 with standard wing door replaced by sliding door. When open the door slides into the sidewall of the safe. All other features are identical with EK 4700 series.

Optional inner equipment

- Additional shelves
- Inner boxes
- Drawers (lockable, unlockable, with timer locker)
- Electrically operated platform for cash - box with timer locks

Series	EK 4800 PT3
Outer dimensions / (HxWxD)	865 x 860 x 800 mm
Weight (according type)	195 - 350 kg
Power supply	ZN 12/1600
Standard colour	RAL 7035



EK 1553 U Compact
in EK 4800 PT3 safe